

Specifications Guide

UVB50W-120-240V-TA

> 95%
> 90%
EOL/OC
timer, buzzer,
reset switch, LEDs
0-40°C
75°C
"A"
.10 lbs

Lamp Type /Catalog #	Manufacturer	Power (W)	Current (mA)
ASIH1003 (17")	Ultravation	24	400
ASIH1001 (12")	Ultravation	16	400
TUV 25W 4P SE	Philips	23	350
GPH436T5VH/4	Heraeus	21	400
GPH436T5L	First Light	25	450
GPH463T5L/4	Atlantic	23	425



Ballast Specifications

Ballast type: Program Start (PS)
Number of lamps: 1 or 2
Normal input voltage: 120-240V, +/-10%, 50/60 Hz
Input current: 0.42A(120V)/0.22A(240V)
Input current THD: < 10%
Input power: 50W @ full load
Operating frequency: > 25kHz
Lamp current crest factor: 1.7 or less
Approvals: UL/cUL Listed,
Class "P", Indoor, Type 1

Power factor:
Efficiency:
Ballast shut down/protection:
Status indication/Alarm:

Ambient temperature:
Case maximum temperature:
Sound rating:
Weight:

Wiring Diagram and Dimensions

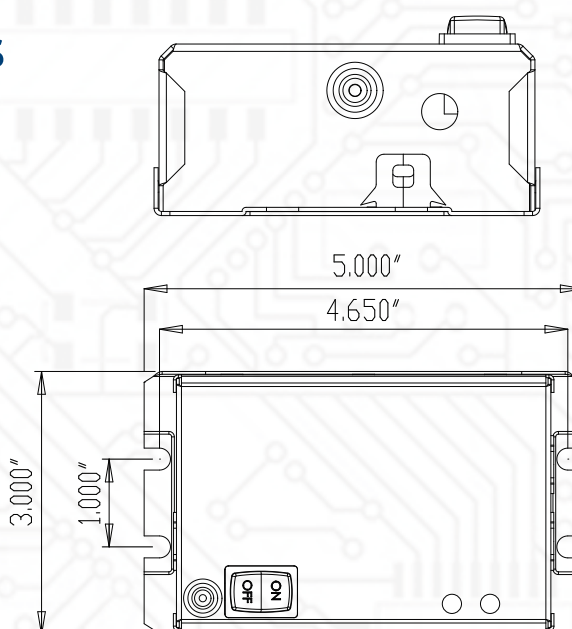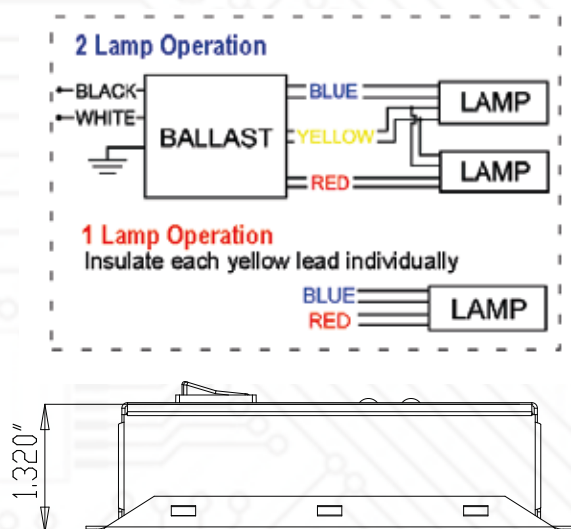

Allanson
LIGHTING TECHNOLOGIES



83 Commerce Valley Drive East, Markham, ON L3T 7T3 Canada
www.allanson.com | cservice@allanson.com | T: 1.800.668.9162 | F: 416.752.6717