


24/7 BLINKERBEACON™

SELF-CONTAINED, TOP MOUNT

SPECIFICATIONS

POWER	Low voltage; Current controlled from TAPCO controller
SOLAR PANEL	18W
BATTERY	4.8V Leak Proof NiMH (Nickle-Metal Hydride), Waterproof connector 14Ah
DIMMING	Adjustable based on solar panel input through TAPCO controller
LED HOUSING	Black or yellow polycarbonate
LED VISOR AND DOOR	Black polycarbonate cap visor
VEHICLE LED MODULES	12 in. round
LED COLOR	Amber or red
FLASH PATTERN	MUTCD-compliant options
VISIBILITY	Daytime: more than 1,000 feet Nighttime: more than 1 mile
MOUNTING ASSEMBLY	Universal mounting bracket
LIFE EXPECTANCY	100,000 hours
OPERATING TEMPERATURE RANGE	-40° F to 165° F (-40° C to 74° C)

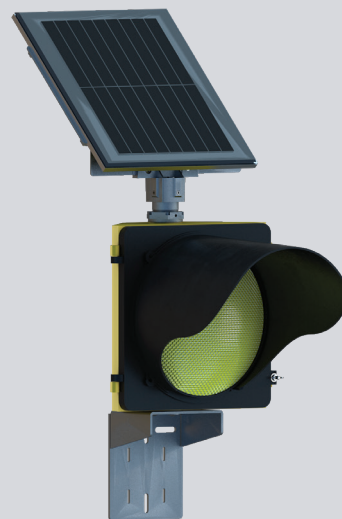

AMBER LED YELLOW HOUSING



RED LED BLACK HOUSING